

BPHC Series Mulcher




Introducing the BULLY BPHC Series, a robust high-body Mulcher built for tractors from 50 to 110hp. Designed in Europe and developed over two years, it is proficient at mulching tougher crop trash, maize stalks, vegetable tops, sugarcane and potatoes, pasture topping, tussock eradication, grass, fern, and bracken work.

The three-blade configuration - featuring Y-shaped blades with a central straight blade - operates with a high blade tip speed of 66 meter per second (12,992 feet per minute) to produce a fine cut. The BPHC Mulcher delivers an even layer of biological fertiliser, improving the quality of property and pasture in one efficient pass.

The hydraulically controlled rear door gives the operator control from the tractor seat:

- Door closed for a finer mulch that breaks down quickly and enriches the soil.
- Door open for faster discharge, keeping up your ground speed for increased productivity.

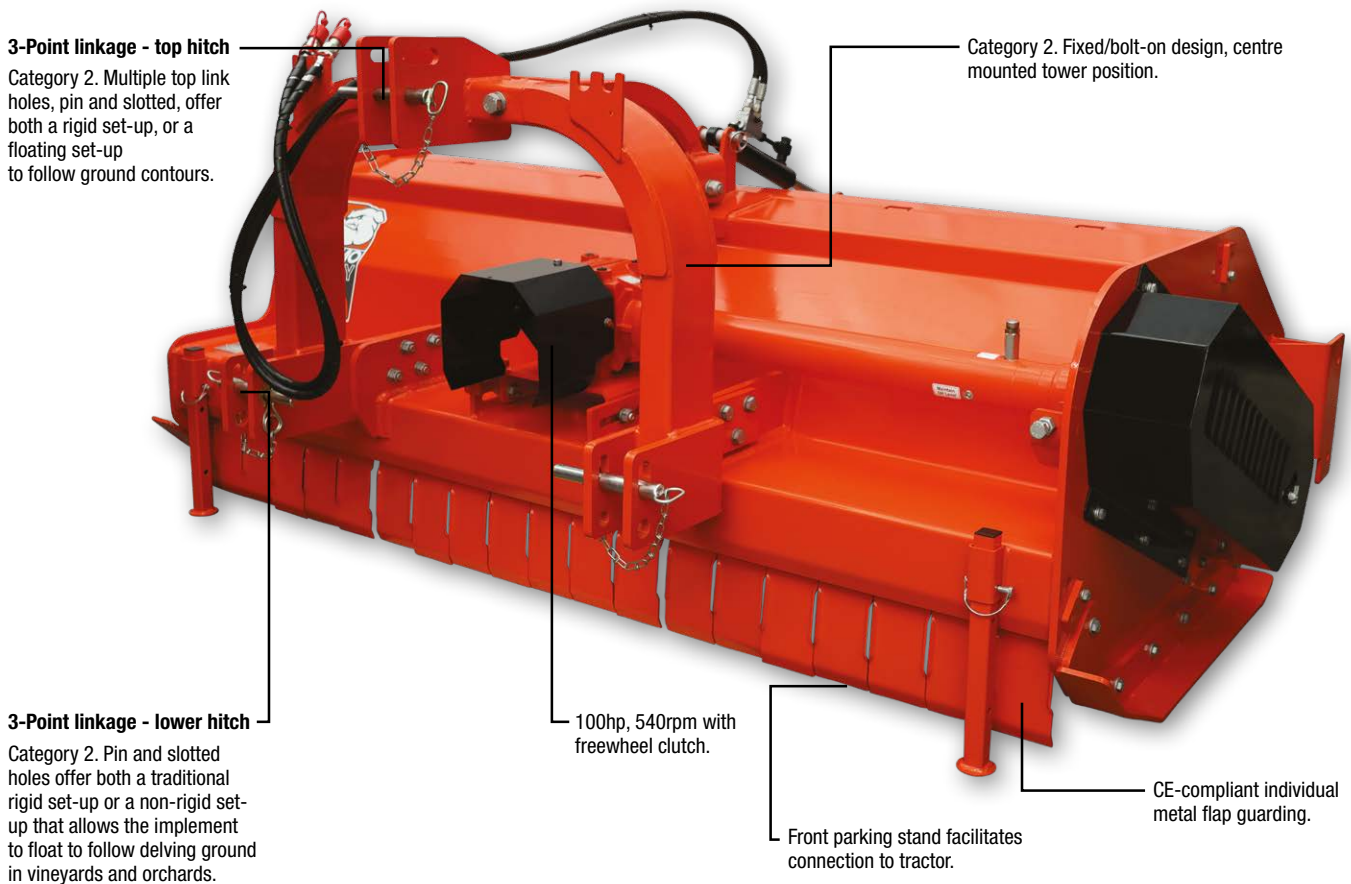

Code	BPHC160	BPHC180	BPHC200	BPHC225	BPHC250
Size reference	1.6m 5'4" 64"	1.8m 6'0" 72"	2.0m 6'8" 80"	2.25m 7'6" 90"	2.5m 8'2" 98"
Belts	Four (4) XPB type				
Gearbox	100hp, 540rpm with freewheel				
PTO shaft	Series 6				
Rear door	Hyd. open w 1 x cylinder			Hyd. open w 2 x cylinders	
Rotor swing dia. (mm)	570				
Rotor diameter (mm)	160				
Rotor speed (rpm)	2,268				
Type of flail	Y-Blades with centre straight blade				
No. of flails	32 + 16	36 + 18	40 + 20	44 + 22	52 + 26
Overall width (mm)	1950	2150	2350	2590	2850
Working width (mm)	1580	1780	1980	2230	2480
Tractor range (hp)	50 - 110	60 - 110	70 - 110	75 - 110	80 - 110

Choose the Right Support for Your Terrain

Every BPHC Series mulcher comes standard with skids. To further protect the rotor and maintain a consistent cutting height, each implement is manufactured with either 360° spinning wheels or a rear roller, depending on terrain and operating needs.

Rear 360° Spinning Wheels – Ideal for smooth, flat ground, allowing for faster operation and easy maneuverability.




Skids

Raised leading edge skid design prevents trash build-up while safeguarding the rotor.

Height adjustable, 360° turning solid cushion tyre with greasable stud axle.

Code	BPHC160W	BPHC180W	BPHC200W	BPHC225W	BPHC250W
Cutting height (mm)	30mm 60mm 90mm 120mm 150mm				
Weight (kg)	943	980	1045	1115	1194

Rear Roller – Best suited for uneven, rutted terrain, as it spans the full width of the machine, providing extra rotor protection.

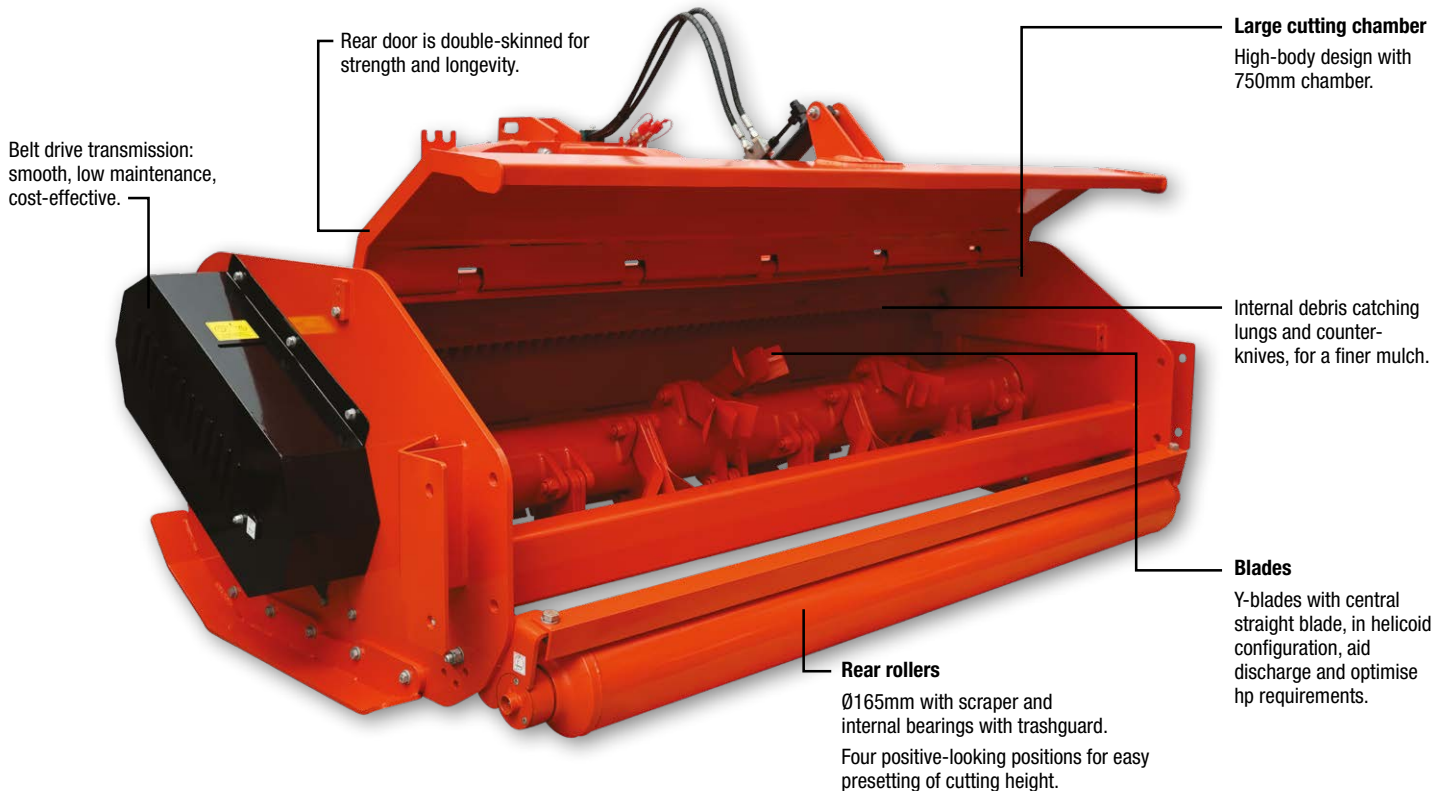

Code	BPHC160R	BPHC180R	BPHC200R	BPHC225R	BPHC250R
Cutting height (mm)	30mm 60mm 90mm 120mm				
Weight (kg)	813	850	915	985	1064